

General Description

The LM337 is adjustable 3-terminal negative voltage regulators capable of supplying -1.5 A or more currents over an output voltage range of -1.25 V to -37 V . It requires only two external resistors to set the output voltage and one output capacitor for frequency compensation. The circuit design has been optimized for excellent regulation and low thermal transients. Further, the LM337 feature internal current limiting, thermal shutdown and safe-area compensation, making it virtually blowout-proof against overloads.

Features

- 1.5-A Output Current
- Line Regulation 0.01%/V (Typical)
- Load Regulation 0.3% (Typical)
- 77-dB Ripple Rejection
- 50 ppm/ $^{\circ}\text{C}$ Temperature Coefficient
- Thermal Overload Protection
- Internal Short-Circuit Current Limiting Protections

Applications


- Industrial Power Supplies
- Factory Automation Systems
- Building Automation Systems
- PLC Systems
- Instrumentation
- IGBT Drive Negative Gate Supplies
- Networking
- Set-Top Boxes

Device Information(1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)
LM337	SOT-223 (4)	3.50 mm \times 6.50 mm
	TO (3)	8.255 mm \times 8.255 mm
	TO-220 (3)	10.16 mm \times 14.986 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet. The LF01 is a lead formed (bent) version of the TO-220 package.

Adjustable Negative Voltage Regulator

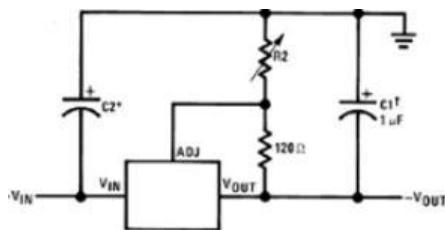

Full output current not available at high input-output voltages

$$-V_{OUT} = -1.25V \left(1 + \frac{R2}{120} \right) + (-I_{ADJ} \times R2)$$

† C1 = 1- μF solid tantalum or 10- μF aluminum electrolytic required for stability

* C2 = 1- μF solid tantalum is required only if regulator is more than 4" from power-supply filter capacitor

Output capacitors in the range of 1- μF to 1000- μF of aluminum or tantalum electrolytic are commonly used to provide improved output impedance and rejection of transients




Ordering Information


DEVICE	PACKAGE TYPE	MARKING	PACKING	PACKING QTY
LM337S	SOT-223	LM337S	Tape	3000/Reel
LM337T	TO-220	LM337T	Tube	1000/BOX
LM337MDTR	TO-252-2L	LM337M	Tape	2500/Reel
LM337CDTR	TO-263-3L	LM337C	Tape	1000/Reel

Pin Configuration and Functions


TO-220 Plastic Package
Package Number NDE0 0 0 3 B
Front View

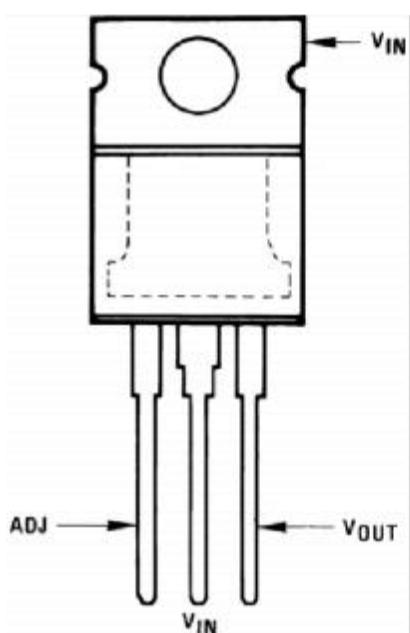

TO Metal Can Package
3-Pin Package Number NDT0003A
Bottom View

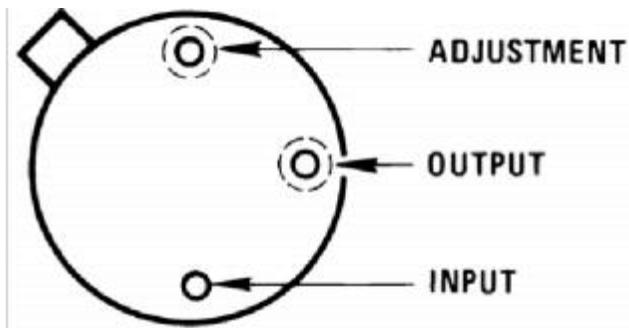

SOT-223
3-Lead Package Marked N02A
Front View

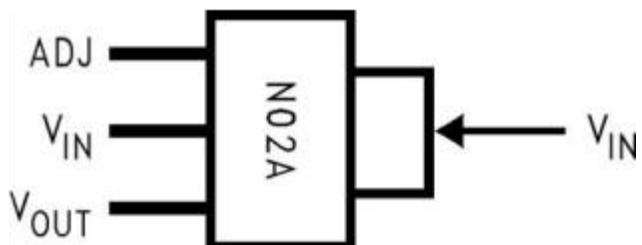

Pin Functions

NAME	PIN			I/O	DESCRIPTION
	TO-220	TO	SOT-223		
ADJ	1	1	1	—	Adjust pin
V _{IN}	2, TAB	3, CASE	2, 4	I	Input voltage pin for the regulator
V _{OUT}	3	2	3	O	Output voltage pin for the regulator

Specifications

5.1 Absolute Maximum Ratings

	MIN	MAX	UNIT
Power dissipation	Internally Limited		
Input- output voltage differential	-0.3	40	V
Operating junction temperature	0	125	°C
Storage temperature, T _{stg}	-65	150	°C



5.2 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Operating junction temperature	LM337	0	125	°C

5.3 Electrical Characteristics

Unless otherwise specified, these specifications apply $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ for the LM337; $V_{IN} - V_{OUT} = 5\text{ V}$; and $I_{OUT} = 0.1\text{ A}$ for the TO package and $I_{OUT} = 0.5\text{ A}$ for the SOT-223 and TO-220 packages. Although power dissipation is internally limited, these specifications are applicable for power dissipations of 2 W for the TO and SOT-223, and 20 W for the TO-220. I_{MAX} is 1.5 A for the SOT-223 and TO-220 packages, and 0.2 A for the TO package.

PARAMETER	TEST CONDITIONS	LM137			LM337-N			UNIT	
		MIN	TYP	MAX	MIN	TYP	MAX		
Line regulation	$T_j = 25^\circ\text{C}$, $3\text{ V} \leq V_{IN} - V_{OUT} \leq 40\text{ V}$ (1) $I_L = 10\text{ mA}$		0.01	0.02		0.01	0.04	%/V	
Load regulation	$T_j = 25^\circ\text{C}$, $10\text{ mA} \leq I_{OUT} \leq I_{MAX}$		0.3%	0.5%		0.3%	1%		
Thermal regulation	$T_j = 25^\circ\text{C}$, 10-ms Pulse		0.002	0.02		0.003	0.04	%/W	
Adjustment pin current			65	100		65	100	μA	
Adjustment pin current charge	$10\text{ mA} \leq I_L \leq I_{MAX}$ $3\text{ V} \leq V_{IN} - V_{OUT} \leq 40\text{ V}$, $TA = 25^\circ\text{C}$		2	5		2	5	μA	
Reference voltage	$3\text{ V} \leq V_{IN} - V_{OUT} \leq 40\text{ V}$, (2) $10\text{ mA} \leq I_{OUT} \leq I_{MAX}$, $P \leq P_{MAX}$	$T_j = 25^\circ\text{C}$ (2) $-55^\circ\text{C} \leq T_j \leq 150^\circ\text{C}$	-1.225 -1.2	-1.25 -1.25	-1.275 -1.3	-1.213 -1.2	-1.25 -1.25	-1.287 -1.3	V
Line regulation	$3\text{ V} \leq V_{IN} - V_{OUT} \leq 40\text{ V}$, (1)		0.02	0.05		0.02	0.07	%/V	
Load regulation	$10\text{ mA} \leq I_{OUT} \leq I_{MAX}$, (1)		0.3%	1%		0.3%	1.5%		
Temperature stability	$T_{MIN} \leq T_j \leq T_{MAX}$		0.6%			0.6%			
Minimum load current	$ V_{IN} - V_{OUT} \leq 40\text{ V}$		2.5	5		2.5	10	mA	
	$ V_{IN} - V_{OUT} \leq 10\text{ V}$		1.2	3		1.5	6	mA	
Current limit	$ V_{IN} - V_{OUT} \leq 15\text{ V}$	K, DCY and NDE package	1.5	2.2	3.5	1.5	2.2	3.7	A
		NDT package	0.5	0.8	1.8	0.5	0.8	1.9	A
	$ V_{IN} - V_{OUT} = 40\text{ V}$, $T_j = 25^\circ\text{C}$	K, DCY and NDE package	0.24	0.4		0.15	0.4		A
		NDT package	0.15	0.17		0.1	0.17		A
RMS output noise, % of V_{OUT}	$T_j = 25^\circ\text{C}$, $10\text{ Hz} \leq f \leq 10\text{ kHz}$		0.003%			0.003%			
Ripple rejection ratio	$V_{OUT} = -10\text{ V}$, $f = 120\text{ Hz}$		60			60		dB	
	$C_{ADJ} = 10\text{ }\mu\text{F}$	66	77		66	77		dB	
Long-term stability	$T_j = 125^\circ\text{C}$, 1000 Hours		0.3%	1%		0.3%	1%		

(1) Regulation is measured at constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specification for thermal regulation. Load regulation is measured on the output pin at a point $\frac{1}{8}$ in. below the base of the TO packages.

(2) Selected devices with tightened tolerance reference voltage available.



5.4 Typical Characteristics

(NDE Package)

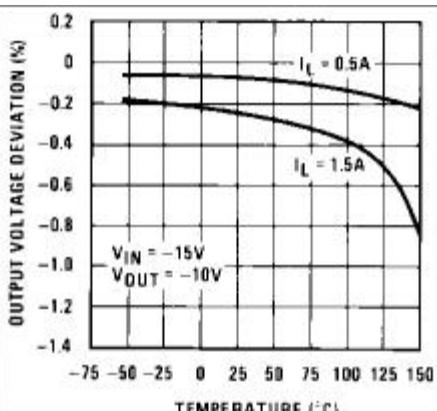


Figure 1. Load Regulation

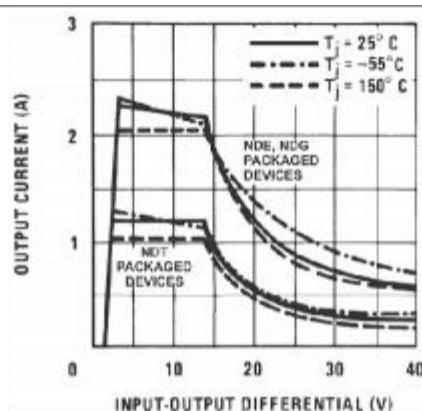


Figure 2. Current Limit

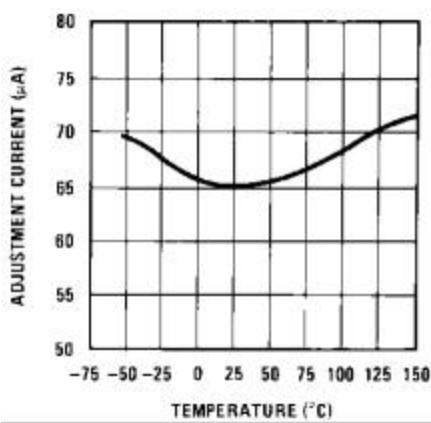


Figure 3. Adjustment Current

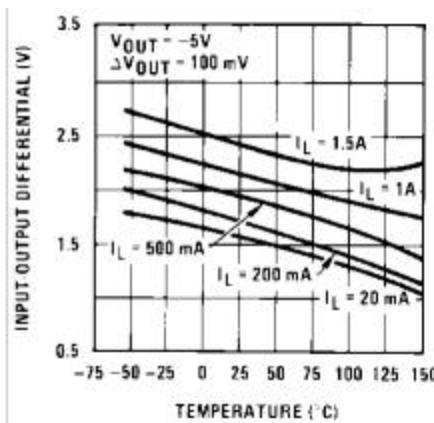


Figure 4. Dropout Voltage

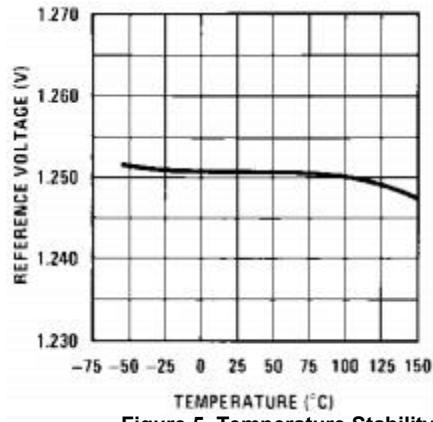


Figure 5. Temperature Stability

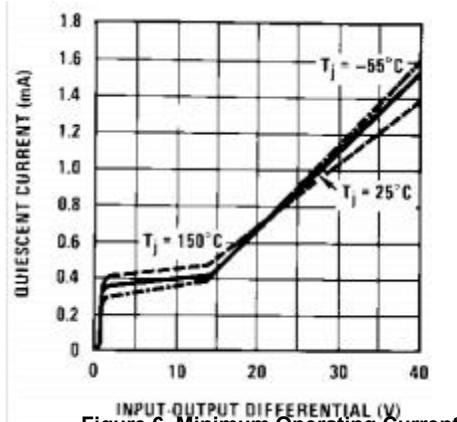


Figure 6. Minimum Operating Current



Typical Characteristics (continued)

(NDE Package)

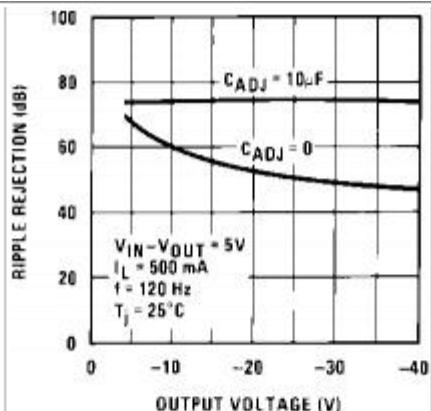


Figure 7. Ripple Rejection

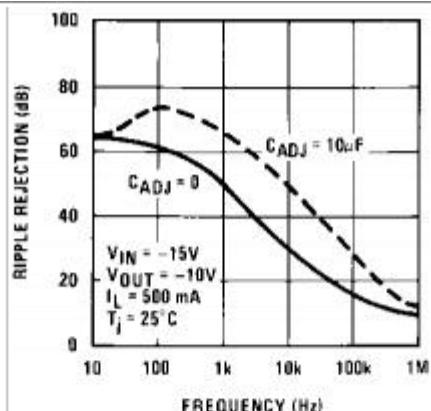


Figure 8. Ripple Rejection

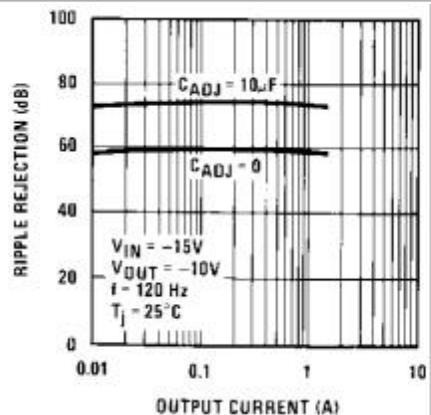


Figure 9. Ripple Rejection

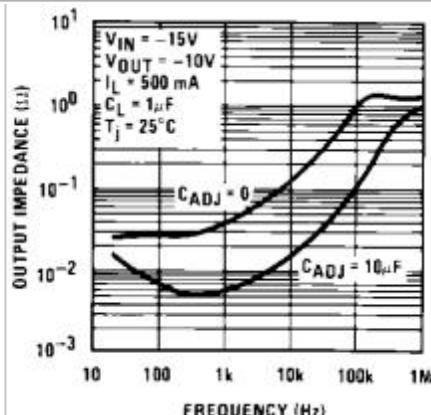


Figure 10. Output Impedance

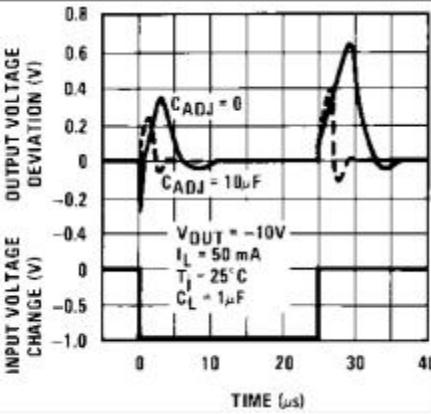


Figure 11. Line Transient Response


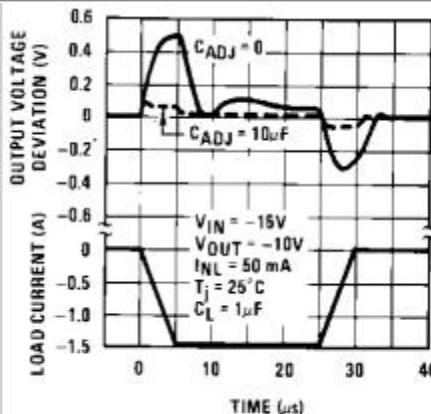


Figure 12. Load Transient Response



DCY (R-PDSO-G4)

PLASTIC SMALL-OUTLINE

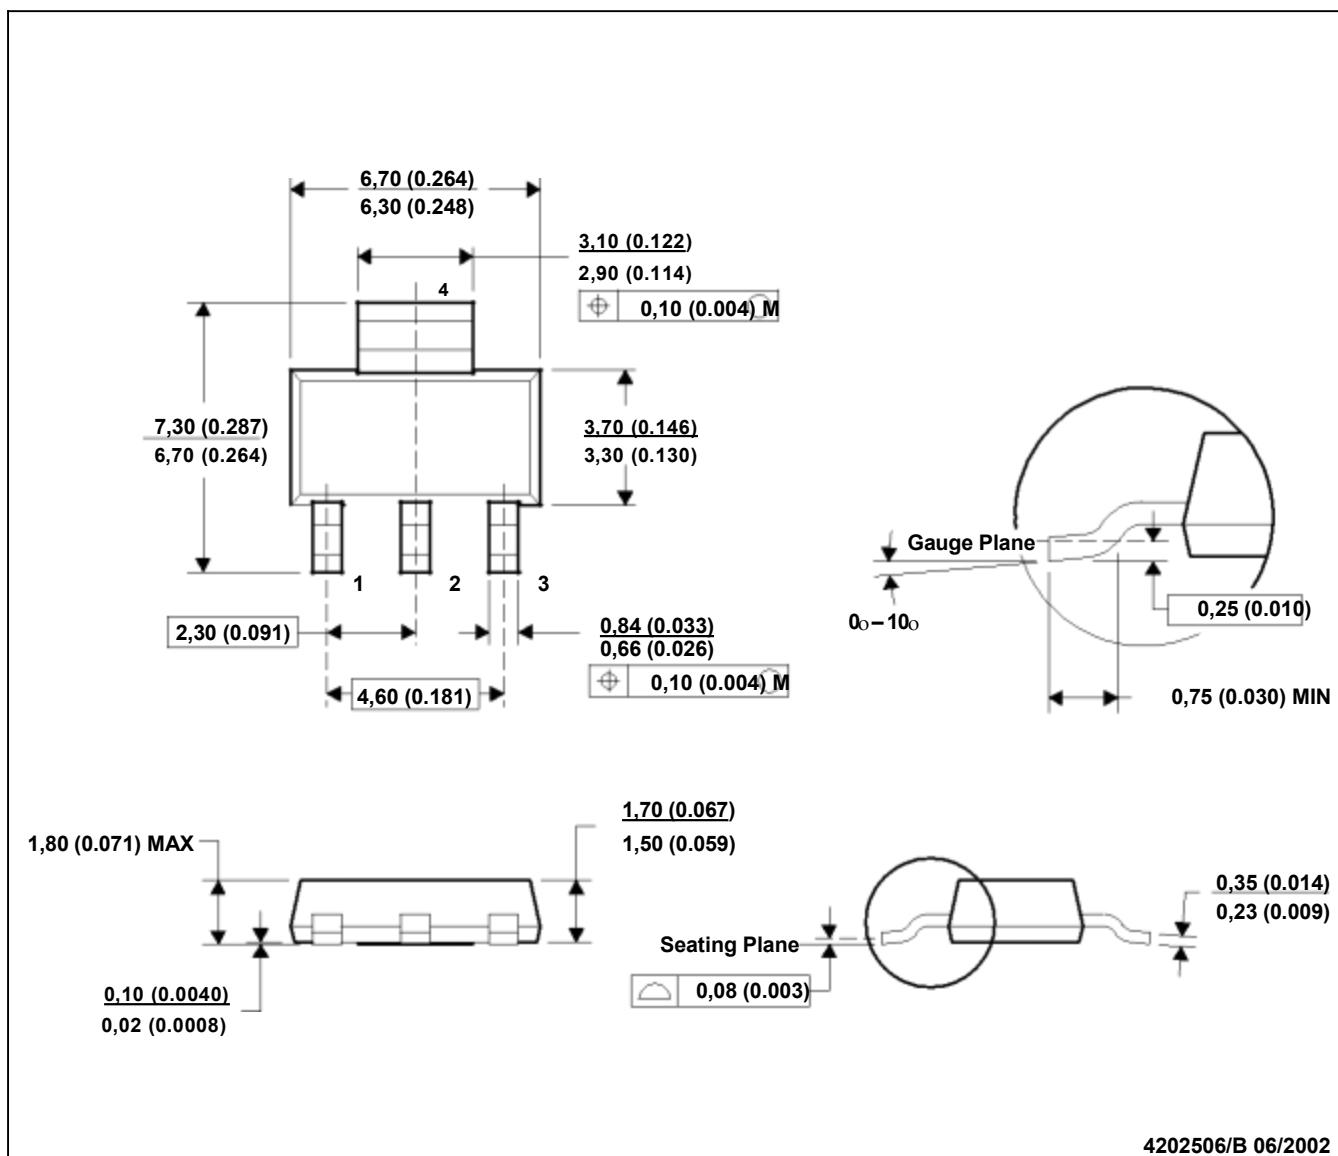


4202506/B 06/2002

NOTES: A. All linear dimensions are in millimeters (inches).
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion.
D. Falls within JEDEC TO-261 Variation AA.




NDG0003F

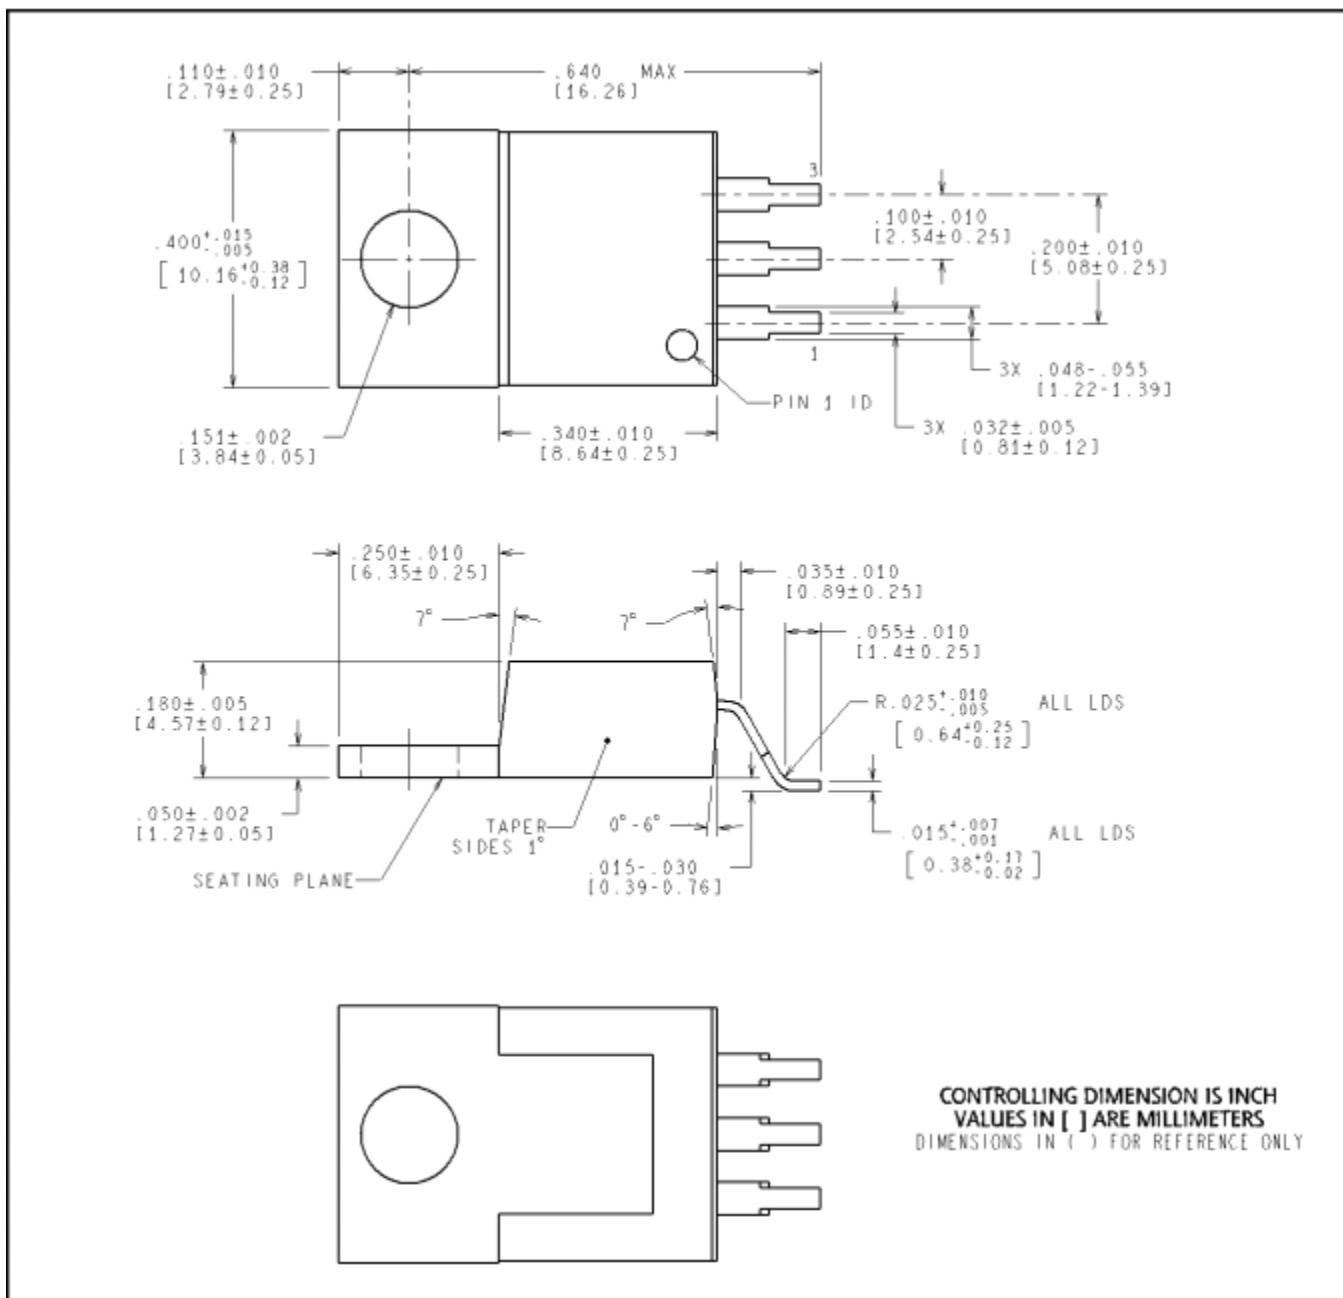



NDT0003A

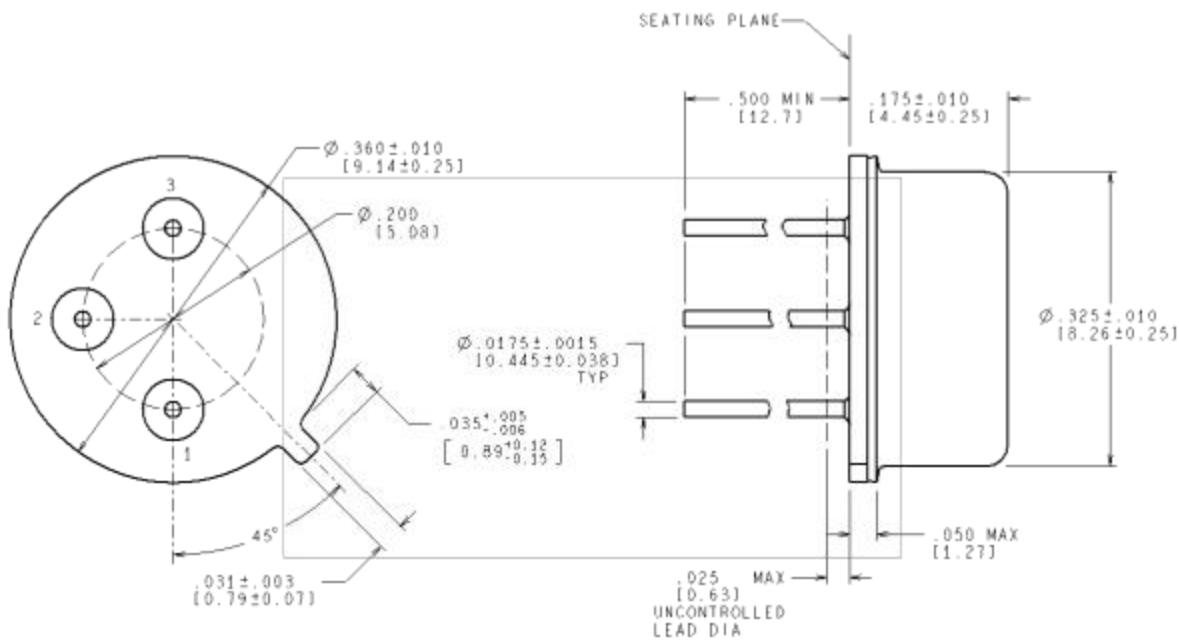


CONTROLLING DIMENSION IS INCH
VALUES IN [] ARE MILLIMETERS

MIL-PRF-38535
CONFIGURATION CONTROL

H03A (Rev D)



NDE0003B

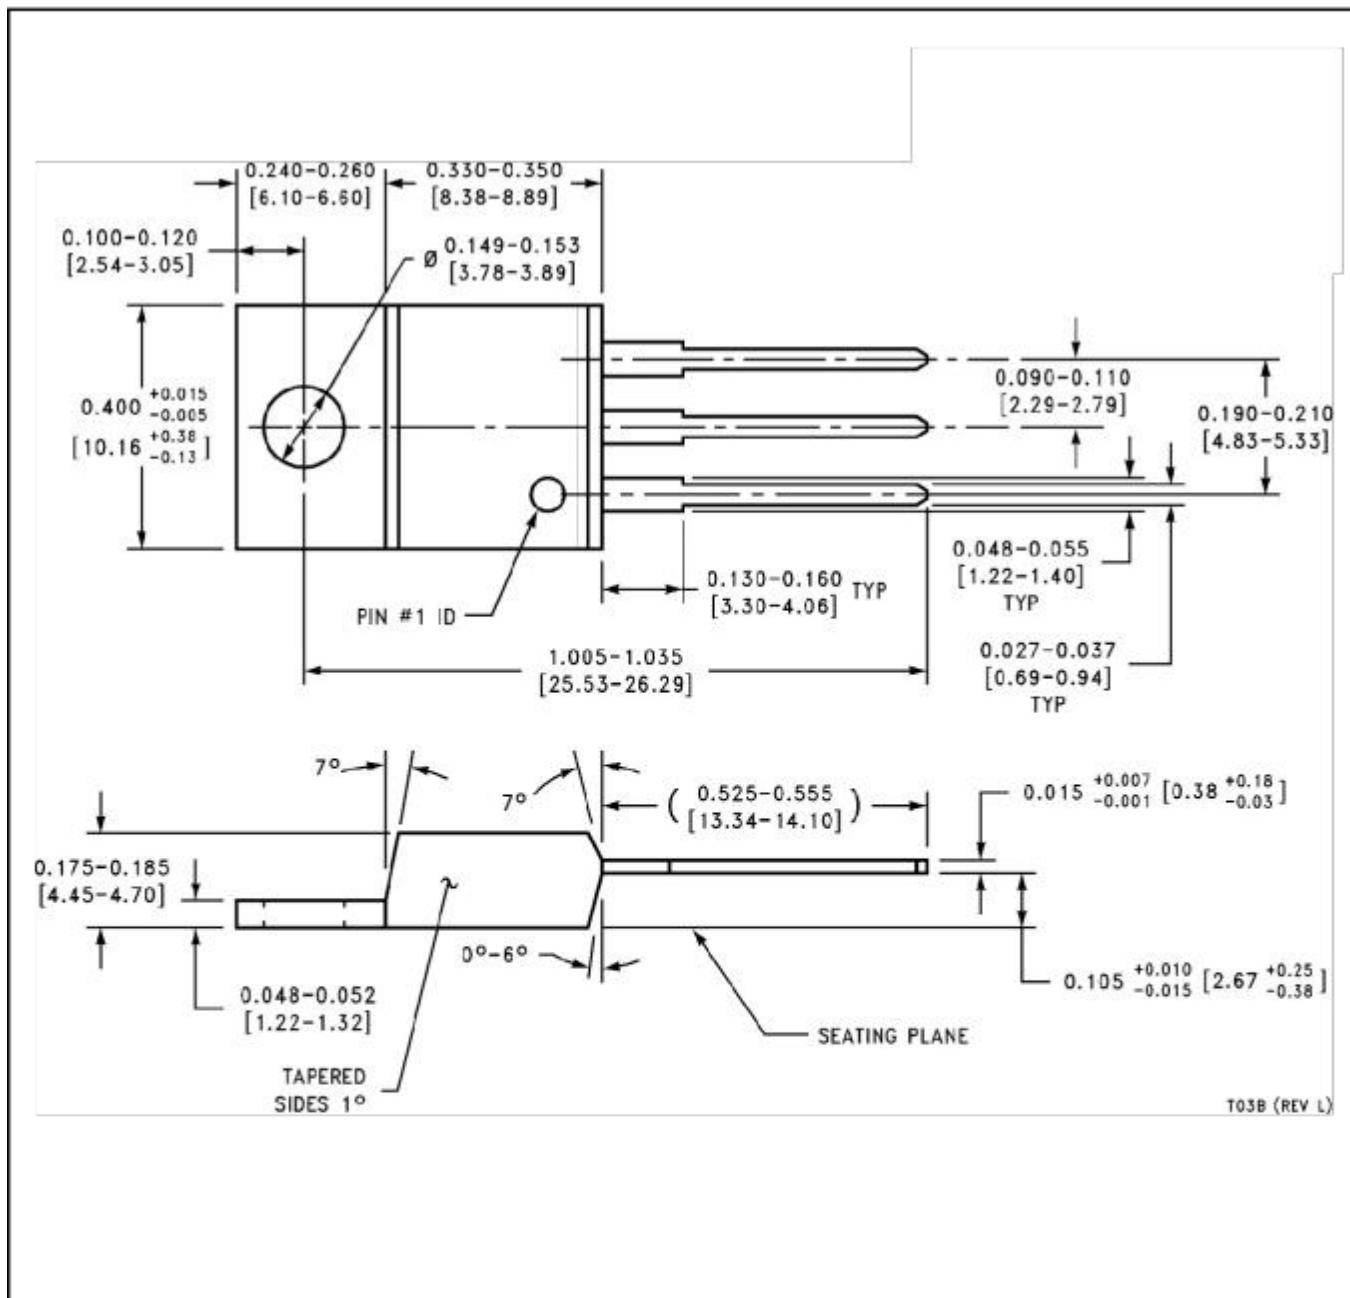



Statement:

- ❖ Shenzhen xinbole electronics co., ltd. reserves the right to change the product specifications, without notice! Before placing an order, the customer needs to confirm whether the information obtained is the latest version, and verify the integrity of the relevant information.
- ❖ Any semiconductor product is liable to fail or malfunction under certain conditions, and the buyer shall be responsible for complying with safety standards in the system design and whole machine manufacturing using Shenzhen xinbole electronics co., ltd products, and take appropriate security measures to avoid the potential risk of failure may result in personal injury or property losses of the situation occurred!
- ❖ Product performance is never ending, Shenzhen xinbole electronics co., ltd will be dedicated to provide customers with better performance, better quality of integrated circuit products.